



4K 30fps



80.8°
Wide Angle



12x
Optical Zoom



Auto Framing with
AI Technology



Humanoid
Tracking



LUXVIEW

AV SMART SYSTEM



4K TRACKING CONFERENCE CAMERA MODEL: LVC412

MAIN FEATURES

4K VIDEO QUALITY

Equipped with the new generation 4K CMOS sensor from SONY with a maximum pixel count of 8 million, this camera can achieve ultra-high resolution video images of 4K (3840x2160), meeting the high image quality requirements of various conference rooms.

12X OPTICAL ZOOM

Equipped with an 80.8° wide-angle lens, this camera features 12x optical zoom and 16x digital zoom, enabling clear capture of details both near and far in the conference room with no distortion at the edges of the image.

AI TRACKING

This camera is equipped with built-in video AI algorithms that can recognize the positions of participants in the conference room and automatically adjust the camera angle to obtain the best composition and framing of the image. It can also be set to track and follow a specific subject as they move during the conference.

COMPATIBLE WITH POPULAR CONFERENCING SOFTWARE

This camera is compatible with popular video conferencing software systems, including Microsoft Teams, Zoom, Cisco WebEx and more, making it easy to connect and start a meeting.

ULTRA-HIGH SIGNAL-TO-NOISE RATIO

Equipped with an ultra-high signal-to-noise ratio CMOS image sensor, this camera effectively reduces image noise in low-light conditions. At the same time, it applies 2D and 3D noise reduction algorithms to maintain a clean and clear image in ultra-low light conditions, with a signal-to-noise ratio of over 55dB.

SILENT MECHANICAL PTZ

Equipped with a silent mechanical PTZ, this camera has a $\pm 170^\circ$ horizontal rotation range and a $-30^\circ \sim +90^\circ$ vertical rotation range, fully covering the entire conference room space and leaving no blind spots, even in corner positions.

COMPATIBLE WITH MULTIPLE TERMINALS

This camera supports HDMI, USB3.0, and network interfaces to simultaneously output 4K UHD video streams, making it compatible with various conference terminals that have different interface requirements.

SPECIFICATIONS

Camera

Video Resolution	HDMI: 4KP30, 4KP25, 1080P30, 1080P25
Sensor	1/2.8", CMOS, 8.51 Megapixels
Scanning Mode	Progressive
Lens	12x, f=3.47mm ~ 41.65mm, F1.84 ~ F3.72
Digital Zoom	16x
Minimum Illuminance	0.5Lux @ (F1.8, AGC ON)
Shutter	1/30s ~ 1/10000s
White Balance	Auto, Indoor, Outdoor, One Push, Manual
Backlight Compensation	Support
Digital Noise Reduction	2D&3D Digital Noise Reduction
Video S/N	≥55dB
Horizontal Angle of View	80.8° ~ 7.5°
Vertical Angle of View	49.9° ~ 4.3°
Horizontal Rotation Range	±170°
Vertical Rotation Range	-30° ~ +90°
Pan Speed Range	2.7° ~ 35.7°/s
Tilt Speed Range	2.7° ~ 31.5°/s
H & V Flip	Support
Image Freeze	Support
Number of Preset	255
Preset Accuracy	0.1°

I/O

USB Interface	1x USB 3.0, Type-C Jack
HDMI Output Interface	1x HDMI 1.4b
Network Interface	1x RJ45: 10M/100M Adaptive Ethernet
Audio Interface	1x Line In, 3.5mm Audio Interface
Communication Interface	1x RS232 In: 8pin Min DIN, Max Distance: 30m, Protocol: VISCA/Pelco-D/Pelco-P
Power Jack	JEITA type (DC IN 12V) / USB B type (DC IN 5V)

IPC Features


Video Compression	H.265 / H.264 / MJPEG
Video Stream	Main Stream, Sub Stream
Main Stream Resolution	3840x2160,1920x1080,1280x720,1024x576,960x540,640x480,640x360
Sub Stream Resolution	1920x1080,1280x720,1024x576,720x576,720x480,720x408,640x360,480x270,320x240,320x180
Video Bit Rate	32Kbps ~ 102400Kbps
Bit Rate Type	Variable Rate, Fixed Rate
Frame Rate	50Hz: 1fps ~ 25fps, 60Hz: 1fps ~ 30fps
Audio Compression	AAC
Audio Bit Rate	96Kbps, 128Kbps, 256Kbps
Support Protocols	TCP/IP, HTTP, RTSP, RTMP, Onvif, DHCP, Multicast, etc

USB Features

Operating System	Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android
Color System / Compression	YUY2 / MJPEG / H.264
Video Format	YUY2 (Isochronous): Max 1080P30; MJPEG: Max 2160P30; H.264 AVC: Max 2160P30; H.264 SVC: Max 2160P30
USB Audio	Support
USB Video Communication Protocol	UVC 1.1~1.5
UVC PTZ Control	Support

General Specifications

Input Voltage	DC 12V / PoE (802.3af)
Input Current	12V 1.0A (Max)
Operating Temperature	-10°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Power Consumption	12W (Max)
MTBF	>30000H
Dimension	142mm (W) × 152mm (D) × 176mm (H)
Weight	1.56kg

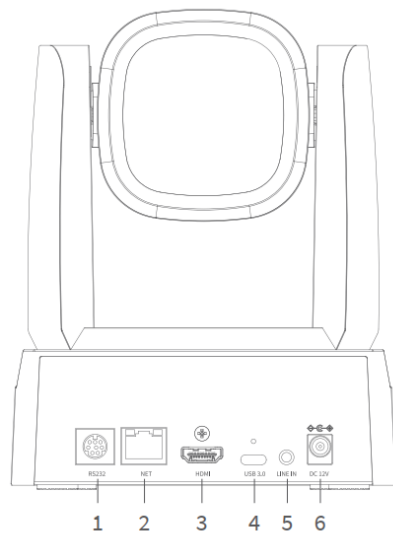

- 1 — RS232 Interface
- 2 — NET Interface
- 3 — HDMI Interface
- 4 — USB3.0 Interface
- 5 — LINE IN Interface
- 6 — DC 12V Power Jack

Disclaimer

Affected by product configuration and manufacturing process, the actual body size/body weight may be different, please refer to the actual product. The product images in this specification are for illustrative purposes only. The actual product effect (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

In order to provide accurate specifications as far as possible, the text description and picture effects of this specification may be adjusted and revised in real time, so as to match the actual product performance, specifications and other information.

© 2024 LUXVIEW The logo and other LUXVIEW marks are owned by LUXVIEW and may be registered. All other trademarks are the properties of their respective owners. LUXVIEW assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice