



LCD
Display screen



4D Rocker



Illuminated
button



Multi Protocol
Support



Adjusting
Knob



CAMERA JOYSTICK CONTROLLER

MODEL: LVJT50

LUXVIEW

AV SMART SYSTEM



MAIN FEATURES

Support Network Control

Support control through network connection.

Support Multiple Protocols

Support visca, visca over IP, onvif, PELCO-D, pelco-p, NDI and other protocols.

Support Control Camera with Software

Support software function control of the camera, with central control function.

Support Camera Zoom Control

The ship type switch is used to adjust the zoom of the conference camera, which is easy to operate and powerful.

Built-in LCD Display

Built in LCD display, supporting Chinese and English display.

Four-dimensional Remote

The imported variable-speed four-dimensional rocker is used for control, which is comfortable and good. Twisting the rocker can directly control the omni-directional rotation of the conference camera, zoom in and zoom out of the lens. According to the strength of the rocker control, the speed can be controlled and the rhythm can be controlled.

Support IE Browser Configuration

Support control through network connection.

Quick Image Adjustment

Quick image adjustment function, which can be directly adjusted through special knobs and buttons, including Automatic Exposure, Shutter, Aperture, Gain, White Balance, Focus, etc.


BASIC PARAMETER

Protocols

Protocol	Pelco-D、Pelco-P、VISCA、VISCA over IP、Onvif、NDI
Number of Connection	VISCA233 : 7 unit / VISCA422 : 7 unit / VISCAIP : 64 unit / ONVIF : 110 unit
Knob/Button Function	Menu switch; Backlight compensation on/off; Auto exposure mode, auto white balance mode, auto focus mode; Manual focus adjustment; Preset set, recall, delete; Aperture value adjustment; Red and blue gain adjustment
Interface	1 x RS232, 30m (max.); 1 x RS485/RS422, 1200m (max.); 1 x RJ45, support PoE power supply; 1 x USB (reserved); 1 x DC 12V

Generic Spec

Input Voltage	DC 12V/PoE(802.3af)
Input Current	0.5A (Max.)
Operating Temperature	0° C ~ 50° C
Storage Temperature	-20° C ~ 70° C
Power Consumption	0.6W (Max.)
Dimension	320mm (W) X 180mm (D) X 100mm (H)

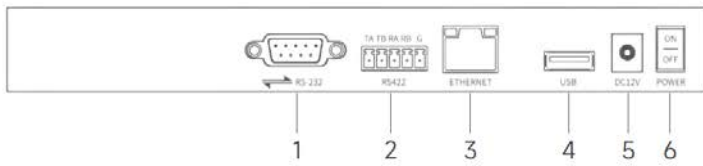

- 1 — RS232
- 2 — RS422
- 3 — ETHERNET

- 4 — USB
- 5 — DC 12V
- 6 — Power Switch

Disclaimer

Affected by product configuration and manufacturing process, the actual body size/body weight may be different, please refer to the actual product. The product images in this specification are for illustrative purposes only. The actual product effect (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

In order to provide accurate specifications as far as possible, the text description and picture effects of this specification may be adjusted and revised in real time, so as to match the actual product performance, specifications and other information.

© 2024 LUXVIEW The logo and other LUXVIEW marks are owned by LUXVIEW and may be registered. All other trademarks are the properties of their respective owners. LUXVIEW assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice